


_

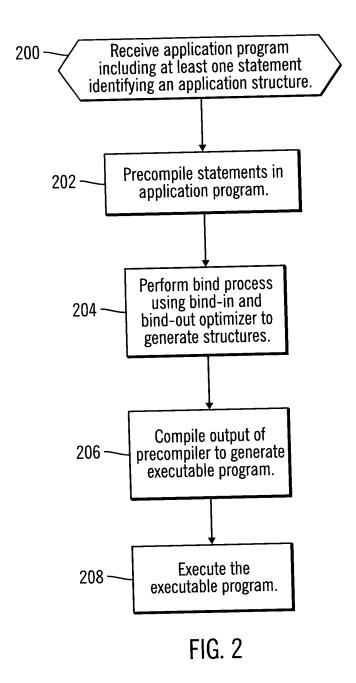

--

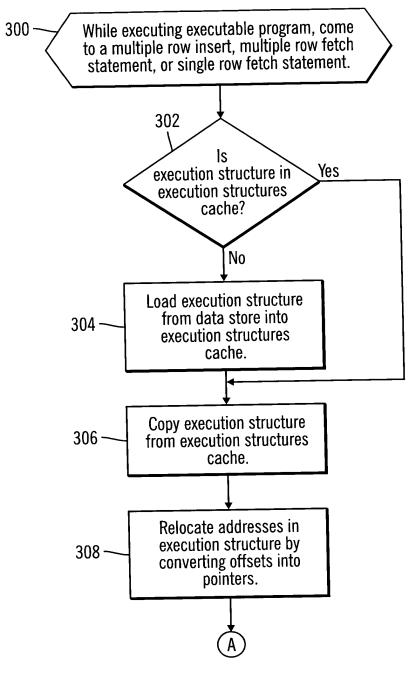


FIG. 3A



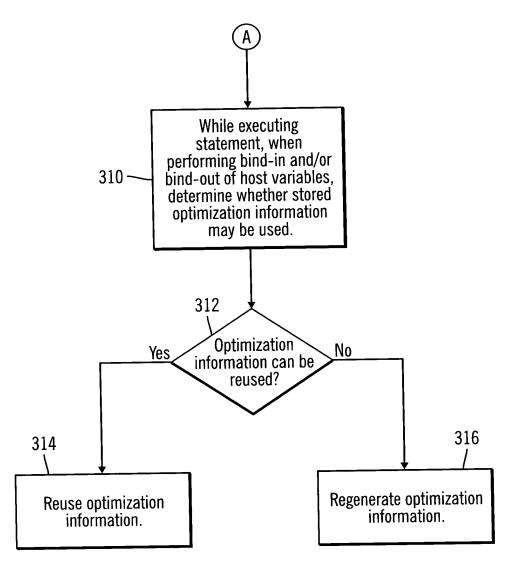


FIG. 3B

╁

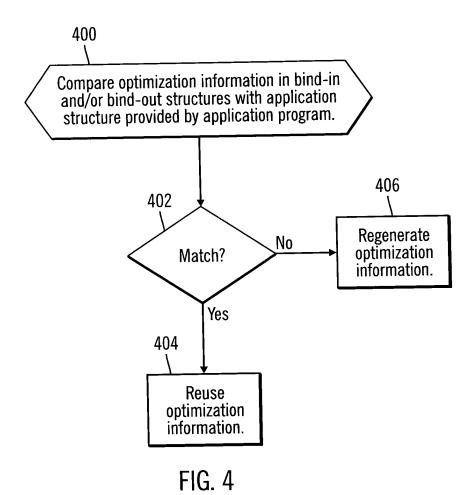

__

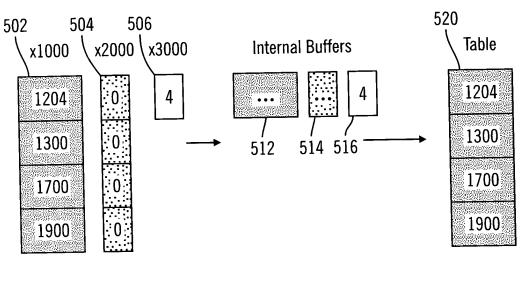

SQLDAID = SQLDA

SQLDABC = 104

SQLN = 2

SQLD = 2

SQLTYPE[1] = 496

SQLLEN[1] = 4

 $\mathsf{SQLDATA}[1] = \mathsf{x}00001000$

SQLIND[1] = x00002000

SQLNAME[1] = x'0008000000010004'

=x'0008000000020000'

SQLTYPE[2] = 496


SQLLEN[2] = 4

SQLDATA[2] = x00003000

 $\mathsf{SQLIND[2]} = \mathsf{x000000000}$

SQLNAME[2]

FIG. 5

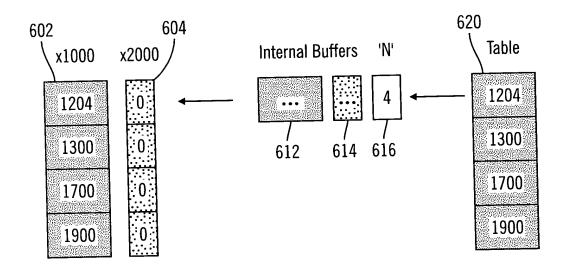

SQLDAID = SQLDA

SQLDABC = 104

SQLN = 2

SQLD = 2

SQLTYPE[1] = 496

SQLLEN[1] = 4


 $\mathsf{SQLDATA}[1] = \mathsf{x}00001000$


SQLIND[1] = x00002000


SQLNAME[1] = x'0008000000010004'

FIG. 6

+-

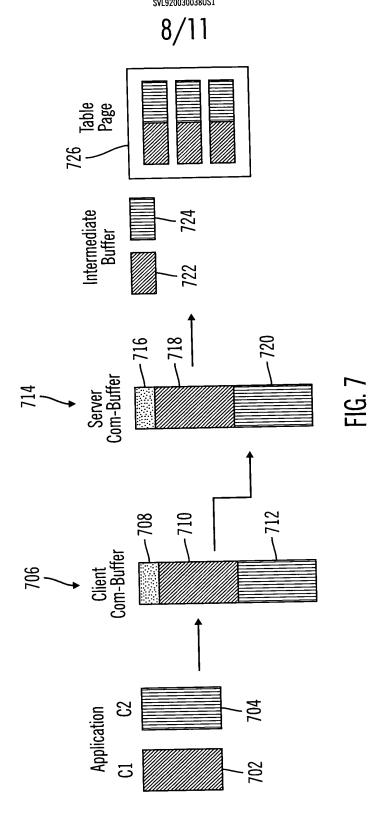

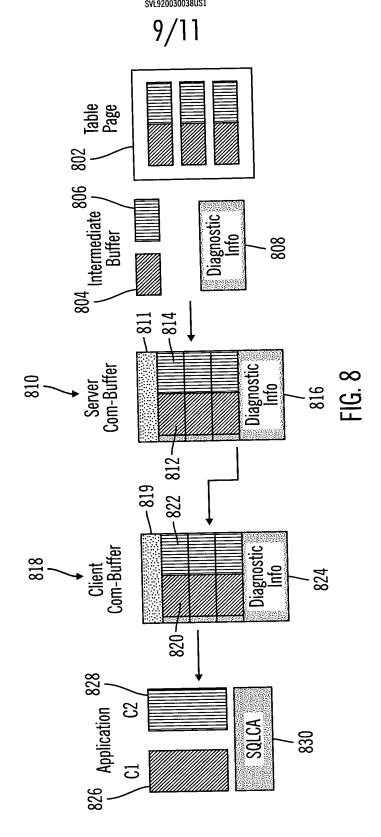

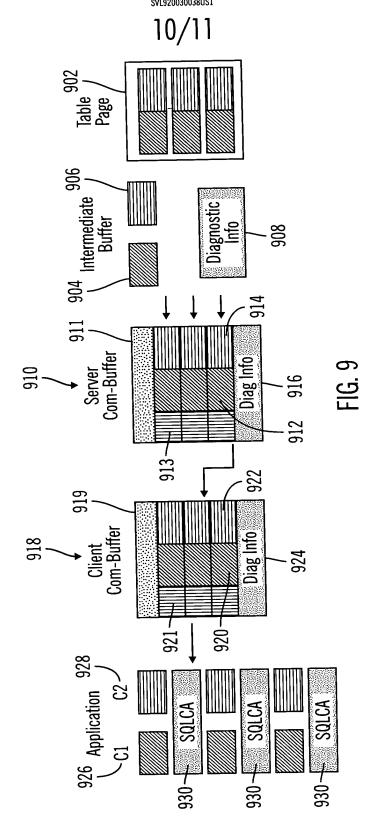

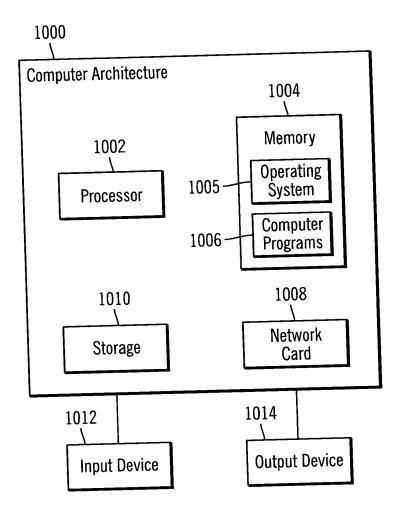


FIG. 10